


# DOMESTIC PRESSURE REGULATOR SET 767 LE/S

## Complete solution, own-medium controlled

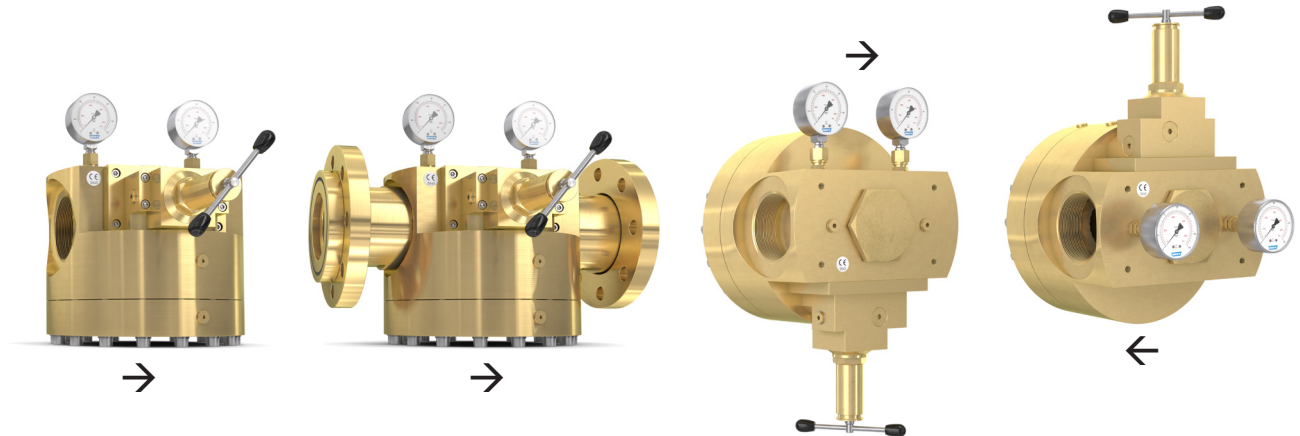

### High performance dome-loaded pressure regulator set.

For high and varying flows requiring maximum pressure stability.

#### Features

- **Pilot Control Tube (PCT)**  
One of the features enabling highly accurate control of outlet pressure
- **Balanced Seat Design (BSD)**  
Further enabling control precision, high reliability and low maintenance
- **A complete solution, ready to use**  
With integrated pilot pressure regulator, and stainless steel pressure gauges, completely assembled and tested
- **Own-medium controlled**  
Enabling autonomous operation (no separate gas supply required)
- **Closed system**  
self-relieving design, but no gas is released to atmosphere
- **Simple to install and operate**  
Removable spindle enables simple setting of the required outlet pressure  
Can be positioned at any angle / orientation  
For indoor and outdoor installation.
- glycerine-filled manometer, unfilled version for oxygen

#### Operation / Usage

Ideal for process gas supply where pressure accuracy is required even when inlet pressures and flow rates are varying.

High flow rates and outlet pressure accuracy are achieved, even when the difference between inlet and outlet pressures is small.

#### Maintenance

Depending on application, moving wetted parts may need replacement every 1-3 years.

For this we offer our Maintenance Set with original spare parts.

#### Options

- Lockable spindle cap
- Maintenance Set

#### Approvals

Company certified according to ISO 9001, ISO 22000 and PED 2014/68/EU Module H

CE-marked according to PED 2014/68/EU

ATEX 2014/34/EU with ignition hazard analysis according to EN 1127-1, DIN EN 13463-1 and ZH1/200

Analysed for Food Safety per HACCP-Analysis

Fulfils the requirements of EU Regulations (EC) 1935/2004, and (EC) 2023/2006

Fulfils the requirements of German Food and Feed (LFGB) Law, and is suitable for contact with food gases

Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems

Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service

#### Available upon request

Certificates and test reports

Other Dome types

Switchover systems / parallel supply systems


Customer-specific / customised versions

# DOME PRESSURE REGULATOR SET 767 LE/S

## Complete solution, own-medium controlled




	Model		
	767LE/S		
<b>Max. inlet pressure</b>	CO <sub>2</sub> 25 bar 363 PSI	O <sub>2</sub> 30 bar 435 PSI	other gases 40 bar 580 PSI
<b>Outlet pressure</b>	0.5 - 10 bar 7 - 145 PSI		
	0.5 - 16 bar 7 - 232 PSI	0.5 - 30 bar 7 - 435 PSI	0.5 - 30 bar 7 - 435 PSI
<b>Connections</b>	Flange DN 100/PN40 or Flange DN 80/PN40 DIN EN 1092-1 G 3 female 3" NPT female		
<b>Kv-Value</b>	30		
<b>Cv-Value</b>	35.1		
<b>Coefficient as per DIN EN ISO 7291</b>	Coefficient of increase in pressure after closing R = 0.47 Coefficient of unevenness I = 0.01		
<b>Temperature range</b>	-30 °C to +50 °C -22 °F to +122 °F		
<b>Housing</b>	Brass		
<b>Cartridge</b>	Stainless steel (1.4305)		
<b>Membrane</b>	CR		
<b>O-Ring</b>	NBR		
<b>Spring</b>	Stainless steel (1.4310)		
<b>Pressure gauge</b>	Stainless steel housing DIN EN ISO 5171 for O <sub>2</sub> , DIN EN 837-1 glycerine-filled for other gases		
<b>Weight approx.</b>	65 kg / 143 lb		

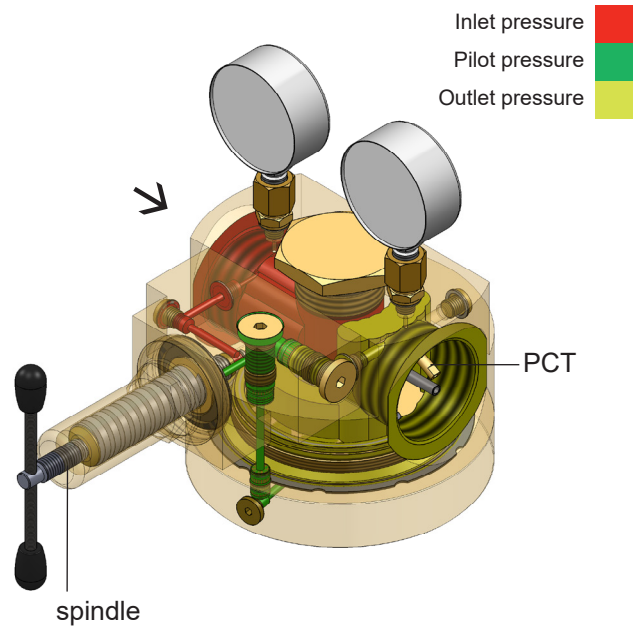

other material (material combinations) upon request

Model	Connection G	Dimensions in mm								
		A	B	C	C <sub>1</sub>	H	L	O (O-ring)	S	SW
767	3" female	237.6	124	17	-	approx. 316	214	-	122	-
	3" NPT female	237.6	124	17	53	approx. 316	320 (L+2xC <sub>1</sub> )	-	122	100
	DN 100/PN 40	237.6	124	17	-	approx. 316	444	126x4	122	95
	DN 80/PN 40	237.6	124	17	-	approx. 316	424	115x3	122	95

other connections upon request

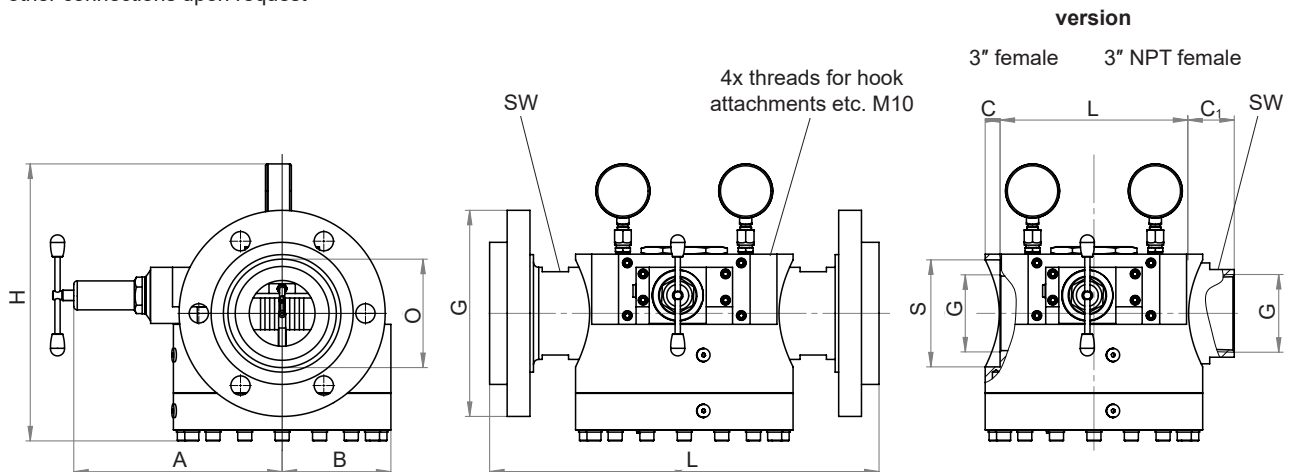


For more pressure regulators visit [www.domepressureregulators.com](http://www.domepressureregulators.com)

# DOME PRESSURE REGULATOR SET 767 LE/S


## Complete solution, own-medium controlled



Pressure control performance examples (N<sub>2</sub>, 20 °C : apply conversion factor of x 0.8 for CO<sub>2</sub>)

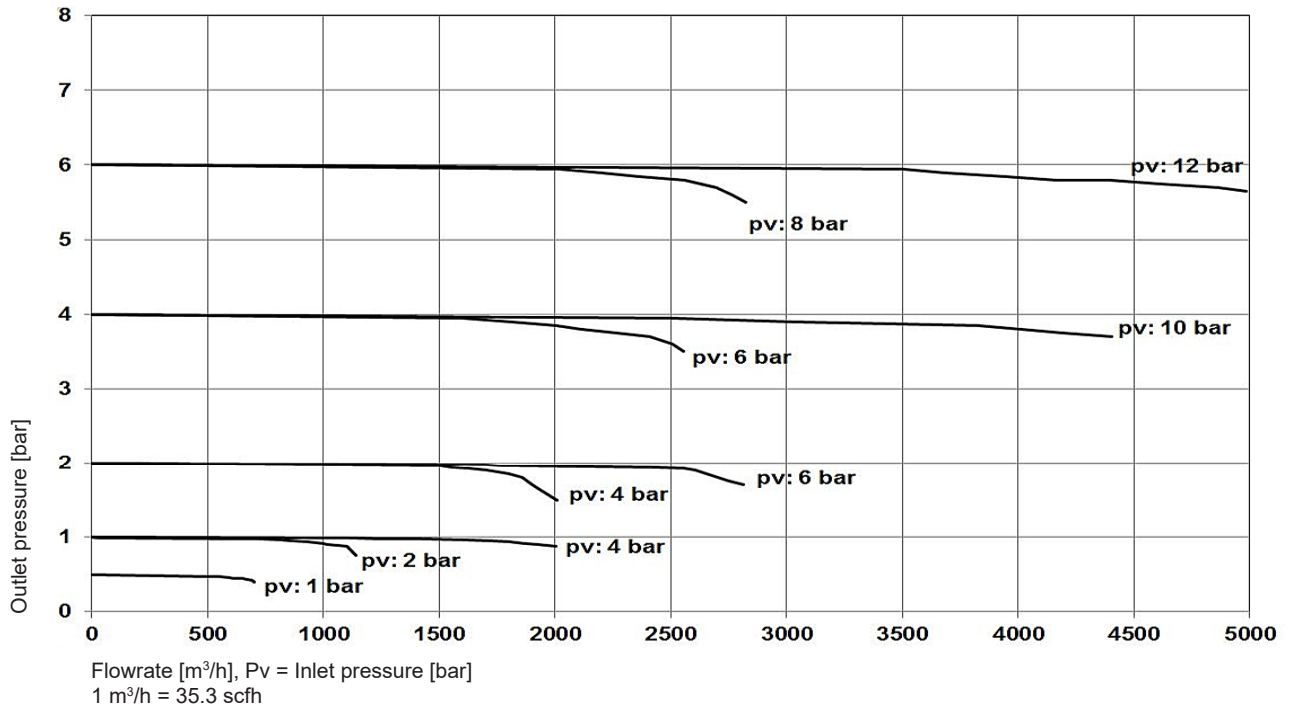

### Flow capacity “envelope“

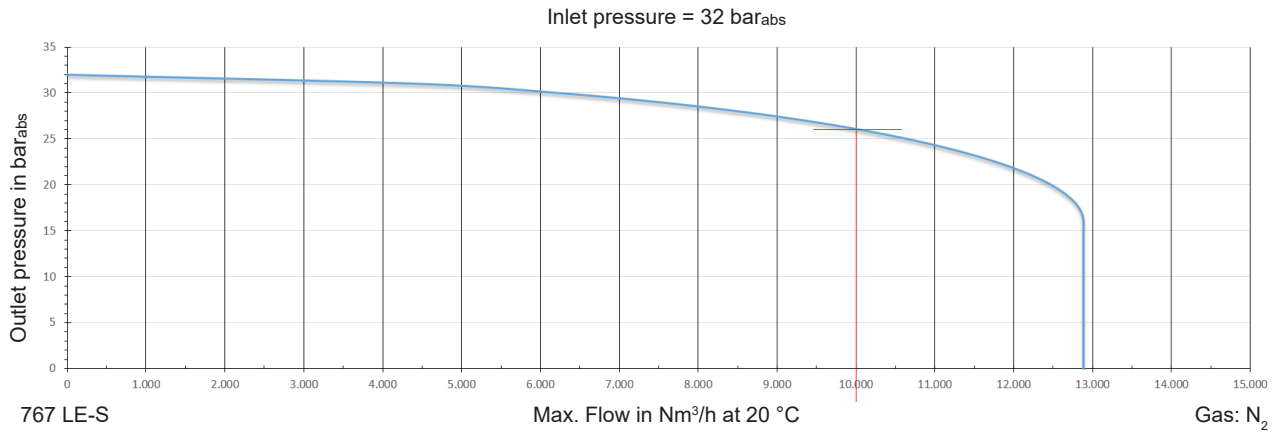

Example:

Inlet pressure: 32 bar<sub>abs</sub>  
 Outlet pressure: 26 bar<sub>abs</sub>  
 Max. Flow: 10,000 Nm<sup>3</sup>/h  
 Gas: N<sub>2</sub>


individual graphs with your parameters upon request

# DOME PRESSURE REGULATOR SET 767 LE/S

## Complete solution, own-medium controlled



Connection combinations

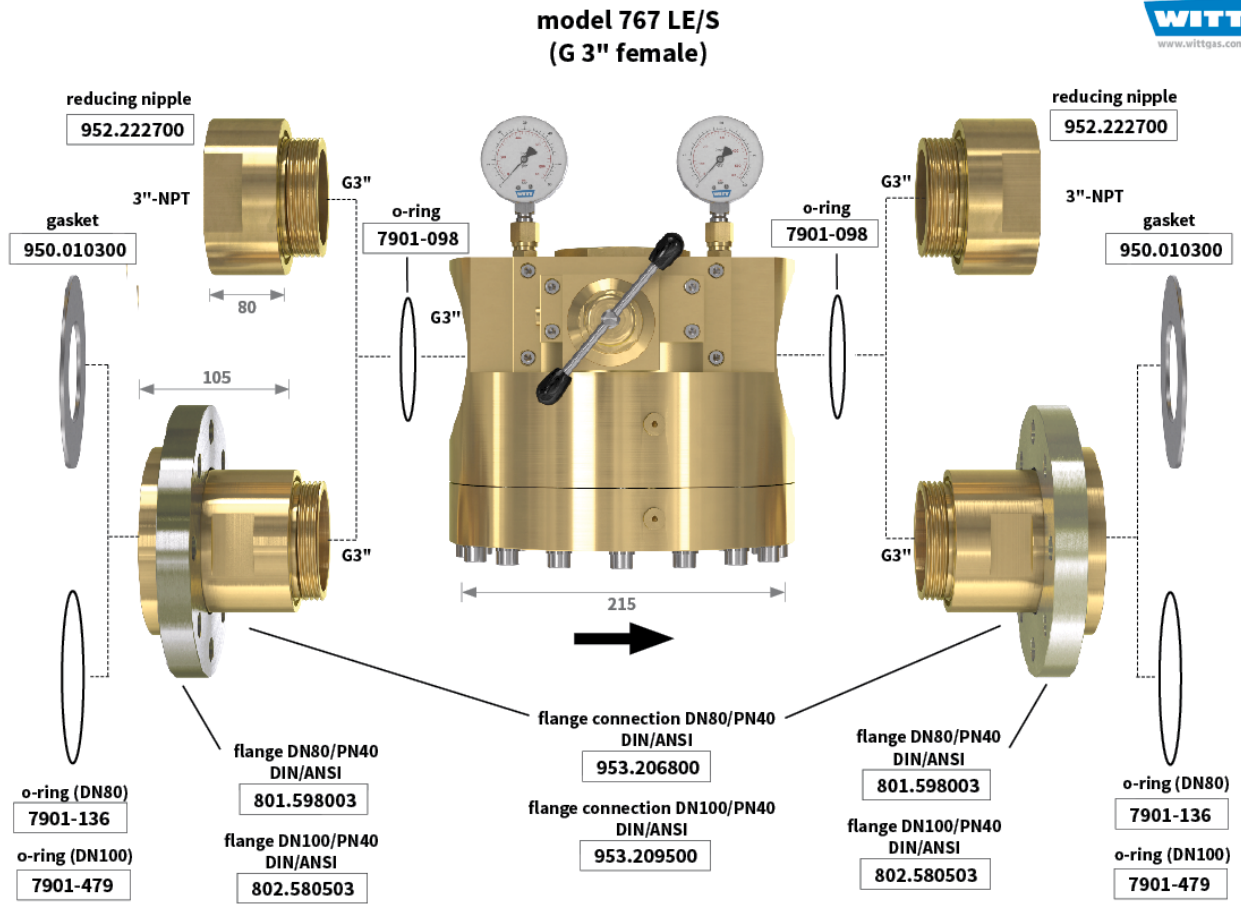

Maintenance Set	
Model	Order-No.
767LE/S	962.000061

Lockable spindle cap	
Model	Order-No.
767LE/S	966.061400

